


MP3-10 message player

The MP3-10 message player facilitates MP3 tones/messaging to be played throuout the building using the new or existing P.A sytem via the B.G.M or AUX 1V input. The unit operates from 12-30vdc, has 10 x triggers with cancel and can be configured for momentry or alternate triggering. Messages/tones are simply added by loading SD card into computer and loading files into corresponding trigger folders. Closing the trigger input via a N.O set of contacts activates message/tone. The unit also has a 0v control output to activate e.g relay or 0v input. The unit has an Alert and Evac input with a 0-9 min time change-over from Alert to evac if required.

Specifications

Power supply	12-30vdc
Current draw	50/300mA
MP3 sample rate	44kHz
Trigger activation	closing contact

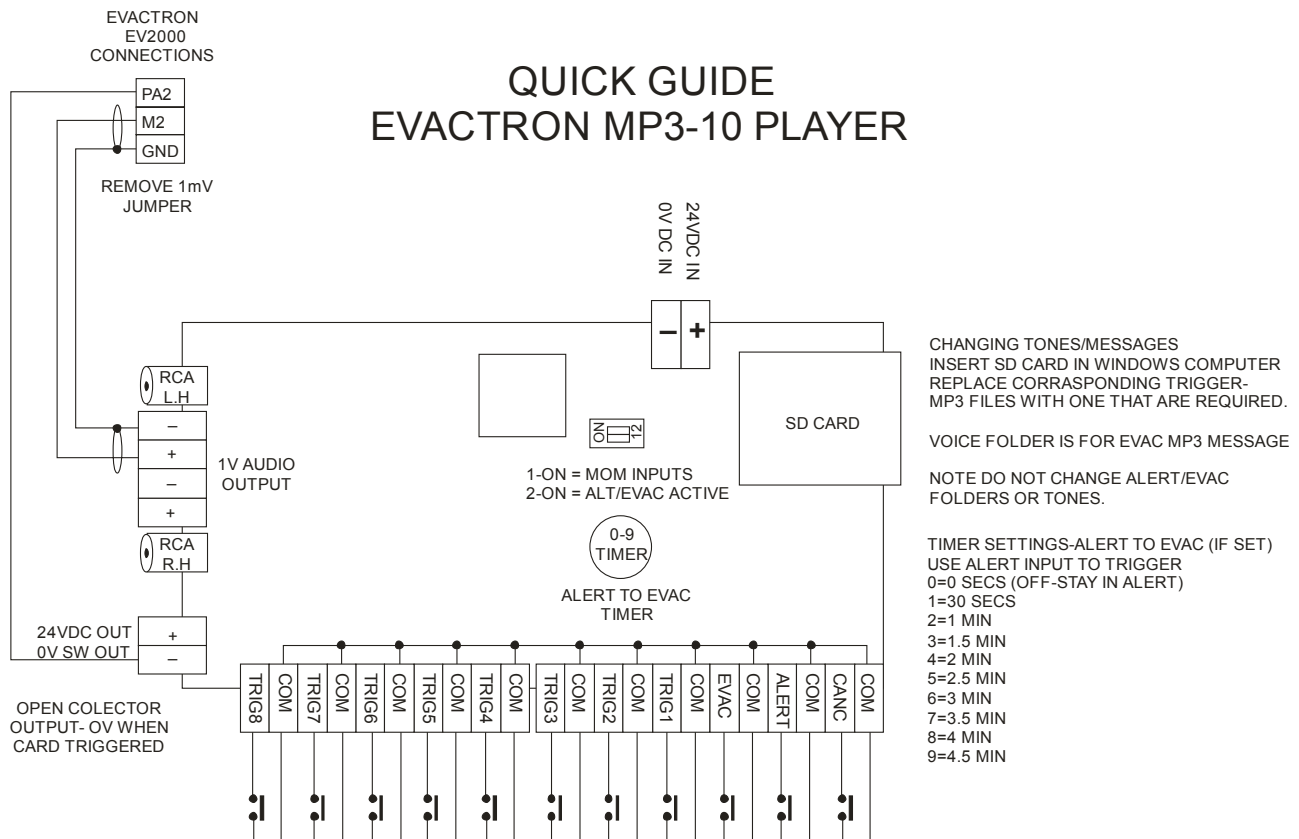

TWO METHODS OF ACTIVATING MESSAGES/TONES
1-MOMENTARY= DSW1-OFF, MOM 0V TO TRIGGER MESSAGE-MOM 0V-CANG TO STOP.
2-ALTERNATE=DSW1-ON, MESSAGE ONLY PLAYS FOR AS LONG AS INPUT HELD AT 0V (FACTORY SET)
NOTE TRIGGER1-8 WILL ONLY PLAY ONCE ON MOMENTARY